

Technical Bulletin

Bulletin No: TCH-002-008

Effective Date: 11/5/2008


Cancels: TCH-002-008 dated 9/10/2008

Page: 1 of 1

Subject: New Bendix® “Welded Clevis” Spring Brake Chamber

Bendix Spicer Foundation Brake LLC now offers spring brake chambers with a welded automatic slack adjuster clevis. Many OEM's are using welded clevis spring brake chambers in production to reduce installation time and to accommodate certain applications. Now the dependable and reliable Bendix® SB-4™ spring brake chambers are available to the Aftermarket for these applications with the time saving welded clevis.

Note: The 1.3 inch pin-to-pin dimension on the welded clevis allows it to be used with single and double clevis pin slack adjusters in applications requiring the dimensions shown here. The Bendix® ASA-5® Slack Adjuster requires a clevis pin-to-pin dimension of 1.0 inch; therefore, it can not be used with the spring brake chambers shown here.

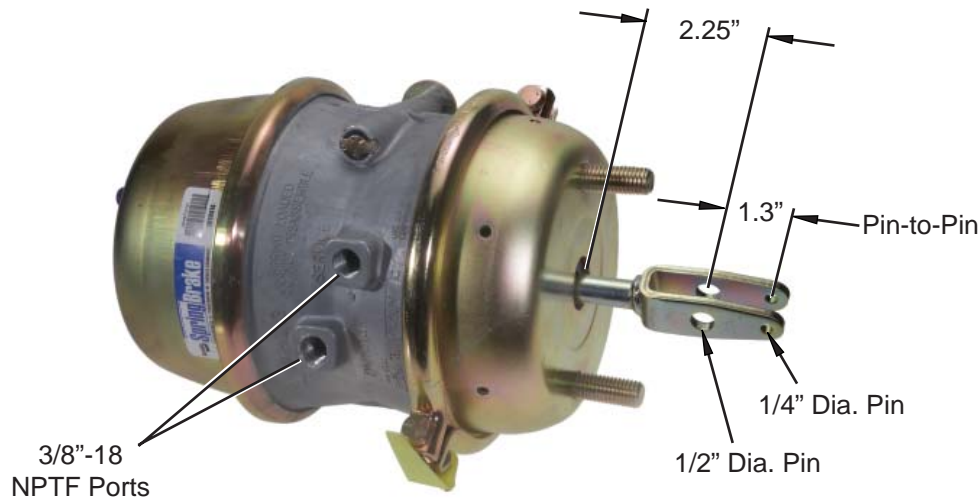

Service Pc. No.	Replaces OE Pc. No.	Type/Size	Stroke	Shipped Caged?
K022868	K020826	30/30	2.50"	Yes
K022882	K020869	30/30 ELS	3.00"	Yes

**Bendix Spicer
Foundation Brake LLC**
A Bendix CVS and Dana Joint Venture